


Rail Mounted Terminal Blocks » Polyamide Range Of Terminals

Select Terminal Series :

Fuse Terminal

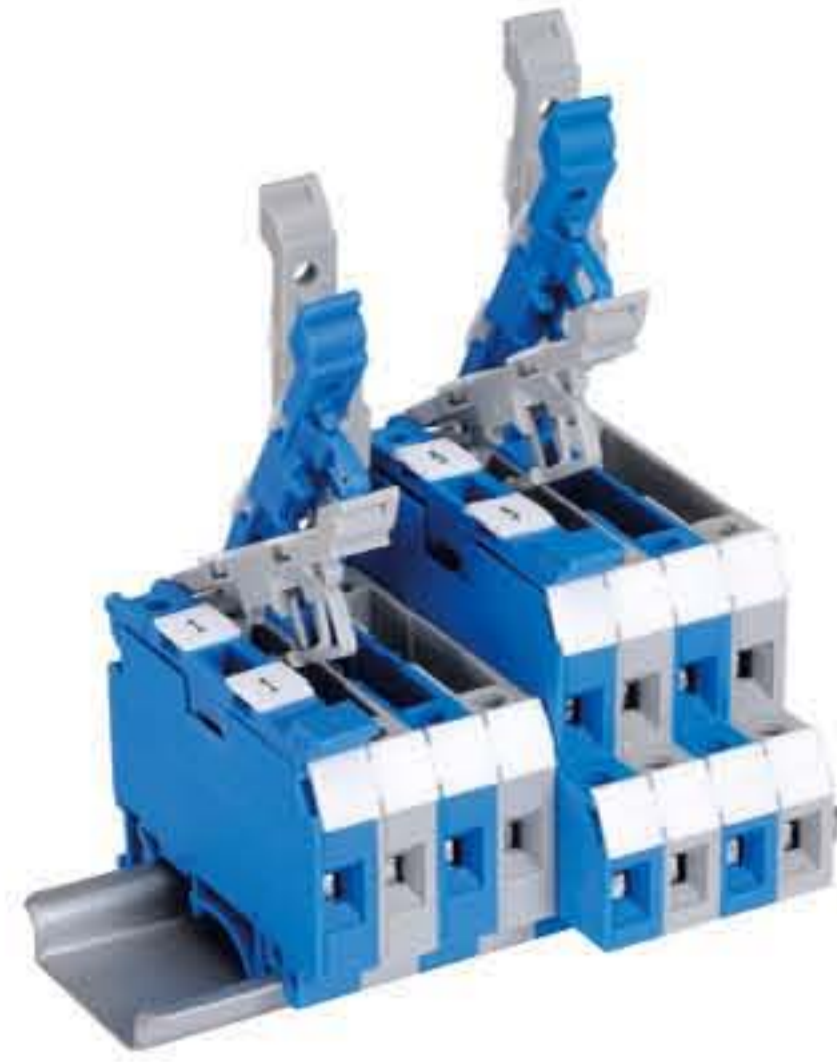

Applications in Control & Automation require fuse protection facility. **elmex** offers Terminal Blocks with built-in safety fuse levers. These Terminal Blocks accommodate a glass cartridge fuse of 5 mm x 20 mm, 5 mm x 25 mm or 6 mm x 32 mm size. The fuse holder is made of special grade phosphor bronze and hence offers low contact resistance. A solid brass link type DL4 in place of the fuse makes it possible to use it as a disconnection type terminal block. **KUDDF4** is a fuse terminal and a standard terminal block (feed through) combined in one housing, giving cost, time and space economy. It occupies the space of one terminal block and works as a pair of terminal blocks - the upper tier with fuse protection. One terminal can be assigned to one pair of signals.

An LED is provided for blown-fuse indication. Standard operating voltages can be selected from the range of D1=24 VDC, D2=48 VDC, D3=110 VDC, D4=220 VDC, D5=12 VDC, A1=110 VAC and A2=240 VAC.

<p>KUDF 4</p>   <p>IEC : 800 V 6.3 A 4 sq mm 0.4 Nm UL : 600 V 7 A 20 AWG - 12 AWG 6 Lbln</p> <p>Height : 42.5 mm (1.66 Inch) Width : 58 mm (2.26 Inch) Pitch : 8 mm (0.31 Inch)</p>	<p>KUDF 4D</p>   <p>IEC : 800 V 6.3 A 4 sq mm 0.4 Nm UL : 600 V 7 A 20 AWG - 12 AWG 6 Lbln</p> <p>Height : 42.5 mm (1.66 Inch) Width : 58 mm (2.26 Inch) Pitch : 8 mm (0.31 Inch)</p>	<p>KUDF 4A</p>   <p>IEC : 800 V 6.3 A 4 sq mm 0.4 Nm UL : 600 V 7 A 20 AWG - 12 AWG 6 Lbln</p> <p>Height : 42.5 mm (1.66 Inch) Width : 58 mm (2.26 Inch) Pitch : 8 mm (0.31 Inch)</p>
<p>KUDDF 4</p>   <p>IEC : 630 6.3 (UT) / 28 2.5 sq mm 0.5 V (LT) A Nm UL : 300 10 (UT) / 20 24 - 12 7 Lbln V (LT) A AWG AWG</p> <p>Height : 51.5 mm (2.01 Inch) Width : 74 mm (2.89 Inch) Pitch : 8 mm (0.31 Inch)</p>	<p>KUDDF 4D</p>   <p>IEC : 630 6.3 (UT) / 28 2.5 sq mm 0.5 V (LT) A Nm UL : 300 10 (UT) / 20 24 - 12 7 Lbln V (LT) A AWG AWG</p> <p>Height : 51.5 mm (2.01 Inch) Width : 74 mm (2.89 Inch) Pitch : 8 mm (0.31 Inch)</p>	<p>KUDDF 4A</p>   <p>IEC : 630 6.3 (UT) / 28 2.5 sq mm 0.5 V (LT) A Nm UL : 300 10 (UT) / 20 24 - 12 7 Lbln V (LT) A AWG AWG</p> <p>Height : 51.5 mm (2.01 Inch) Width : 74 mm (2.89 Inch) Pitch : 8 mm (0.31 Inch)</p>
<p>KUF 10</p>   <p>IEC : 1000 V 12 A 10 sq mm 1.4 Nm UL : 600 V 12 A 18 AWG - 6 AWG 12 Lbln</p> <p>Height : 55.75 mm (2.17 Inch) Width : 66 mm (2.57 Inch) Pitch : 12 mm (0.47 Inch)</p>	<p>KUF 10D</p>   <p>IEC : 1000 V 12 A 10 sq mm 1.4 Nm UL : 600 V 12 A 18 AWG - 6 AWG 12 Lbln</p> <p>Height : 55.75 mm (2.17 Inch) Width : 66 mm (2.57 Inch) Pitch : 12 mm (0.47 Inch)</p>	<p>KUF 10A</p>   <p>IEC : 1000 V 12 A 10 sq mm 1.4 Nm UL : 600 V 12 A 18 AWG - 6 AWG 12 Lbln</p> <p>Height : 55.75 mm (2.17 Inch) Width : 66 mm (2.57 Inch) Pitch : 12 mm (0.47 Inch)</p>
<p>KUFH 4</p>   <p>IEC : 800 V 12 A 4 sq mm 0.5 Nm UL : 600 V 12 A 24 AWG - 10 AWG 8 Lbln</p> <p>Height : 53.5 mm (2.09 Inch) Width : 77.75 mm (3.03 Inch) Pitch : 9 mm (0.35 Inch)</p>	<p>KUFH 4D</p>   <p>IEC : 800 V 12 A 4 sq mm 0.5 Nm UL : 600 V 12 A 24 AWG - 10 AWG 8 Lbln</p> <p>Height : 53.5 mm (2.09 Inch) Width : 77.75 mm (3.03 Inch) Pitch : 9 mm (0.35 Inch)</p>	<p>KUFH 4A</p>   <p>IEC : 800 V 12 A 4 sq mm 0.5 Nm UL : 600 V 12 A 24 AWG - 10 AWG 8 Lbln</p> <p>Height : 53.5 mm (2.09 Inch) Width : 77.75 mm (3.03 Inch) Pitch : 9 mm (0.35 Inch)</p>
<p>UBDF 4</p>   <p>IEC : 1000 V 6.3 A 4 sq mm 0.5 Nm UL : 600 V 10 A 24 AWG - 10 AWG 5 Lbln</p> <p>Height : 56.5 mm (2.20 Inch) Width : 72.5 mm (2.83 Inch) Pitch : 8.25 mm (0.32 Inch)</p>	<p>UBDF 4D</p>   <p>IEC : 1000 V 6.3 A 4 sq mm 0.5 Nm UL : 600 V 10 A 24 AWG - 10 AWG 5 Lbln</p> <p>Height : 56.5 mm (2.20 Inch) Width : 72.5 mm (2.83 Inch) Pitch : 8.25 mm (0.32 Inch)</p>	<p>UBDF 4A</p>   <p>IEC : 1000 V 6.3 A 4 sq mm 0.5 Nm UL : 600 V 10 A 24 AWG - 10 AWG 5 Lbln</p> <p>Height : 56.5 mm (2.20 Inch) Width : 72.5 mm (2.83 Inch) Pitch : 8.25 mm (0.32 Inch)</p>
<p>DCF 4</p>   <p>IEC : 800 V 10 A 4 sq mm - Nm</p> <p>Height : 64.8 mm (2.53 Inch) Width : 60 mm (2.34 Inch) Pitch : 8 mm (0.31 Inch)</p>	<p>DCF 4D</p>   <p>IEC : 800 V 10 A 4 sq mm - Nm</p> <p>Height : 64.8 mm (2.53 Inch) Width : 60 mm (2.34 Inch) Pitch : 8 mm (0.31 Inch)</p>	<p>DCF 4A</p>   <p>IEC : 800 V 10 A 4 sq mm - Nm</p> <p>Height : 64.8 mm (2.53 Inch) Width : 60 mm (2.34 Inch) Pitch : 8 mm (0.31 Inch)</p>